


CAMERA

PLUG + PLAY VISION FOR UNIVERSAL ROBOTS

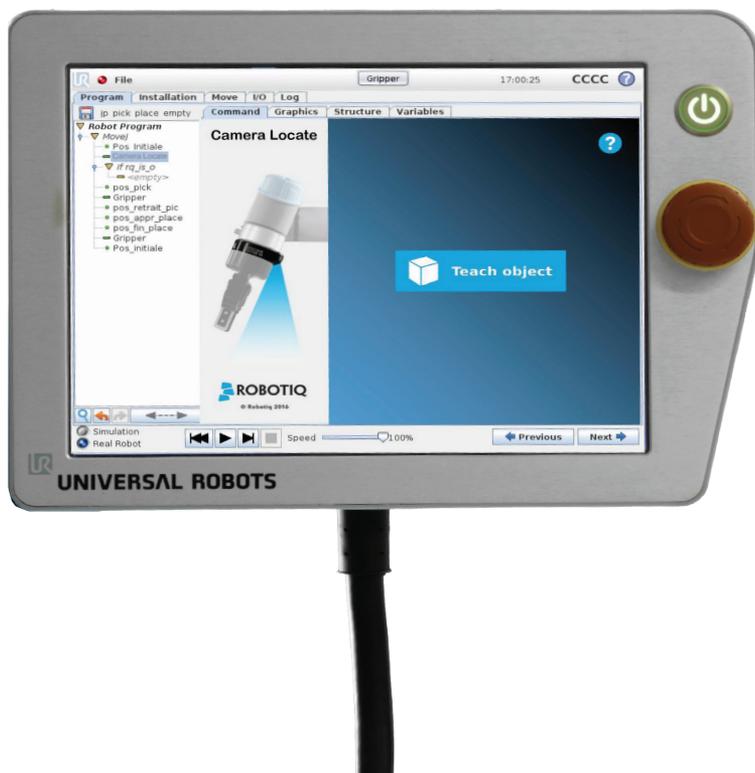

5-MINUTE SETUP

Teach the workspace,
then teach the object.
You're done. No coding
required.


PERFECT FIT FOR UR

Fits on all UR wrists and
connects directly to the
robot controller.

NO EXTERNAL CONTROLLER

No external PC required
to setup, program or run
Camera

ROBOTIQ CAMERA TECHNICAL DATA

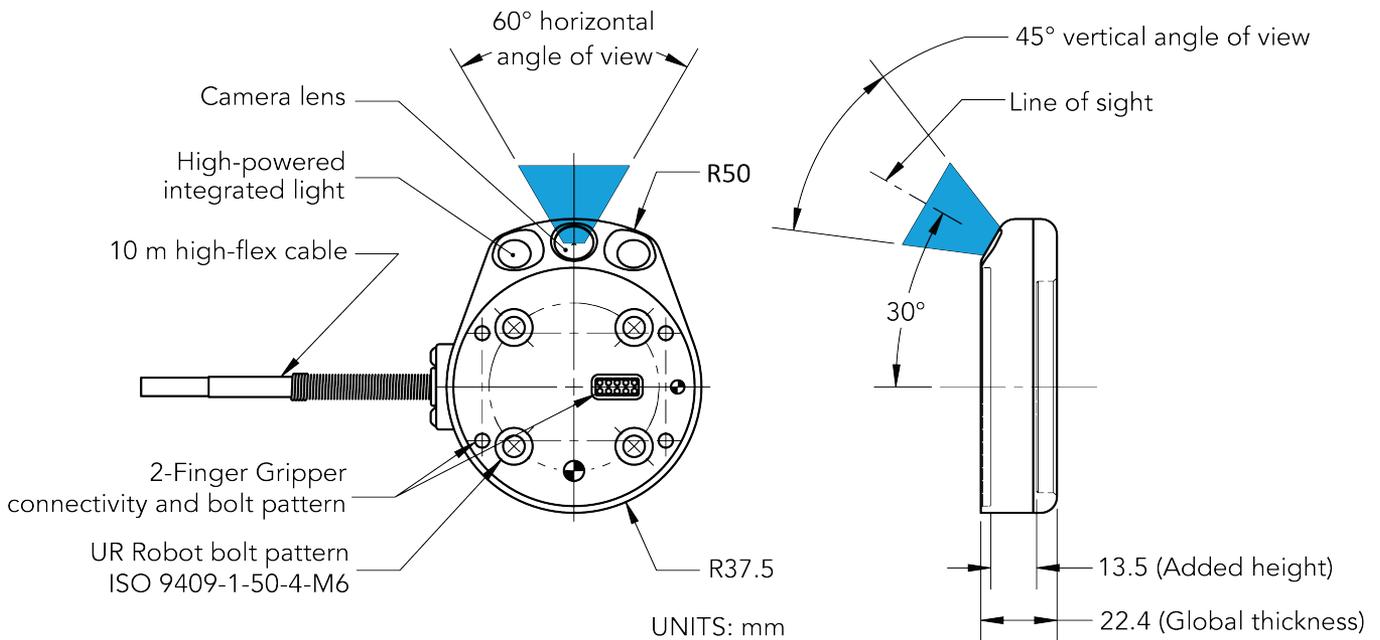

VISION SPECIFICATIONS

Maximal resolution	5 Mpx @ 2fps	2560 X 1920
Maximal framerate	30 fps @ 0.3 Mpx	640 X 480
Active array size	2592 X 1944	
Focus range	70 mm to infinity	

MECHANICAL SPECIFICATIONS

Added height	13.5 mm	Distance between the robot flange and the tool base
Weight	160 g	Without the cable
Operating temperature	-10°C to 50°C	
Environmental protection	Water-tight	

ELECTRICAL SPECIFICATIONS

Nominal supply voltage	24 V DC ±20%	
Quiescent power consumption	1 W	
Maximum power consumption	22 W	When light is on
Communication interface	USB 2.0	Software package available for Universal Robots

總代理



保利機械有限公司
Bolee Machine Tool Ltd.

香港葵涌大連排道21-33號宏達工業中心11樓1110室
Rm 1110, 11/F, Vanta Ind'l Centre, 21-33 Tai Lin Pai Rd., Kwai Chung, Hong Kong
東莞辦：東莞市鳳崗鎮雁田怡紅路怡安(東山)第三座東興樓310號地舖

URL: www.bolee.com.hk

電話：(852) 2421 8529
E-mail：bolee@bolee.com.hk
電話：(0769) 8777 3560

傳真：(852) 2333 4330
傳真：(0769) 8751 0692